


12kV

SF6 Gas / Dry Air Insulated Ring Main Unit

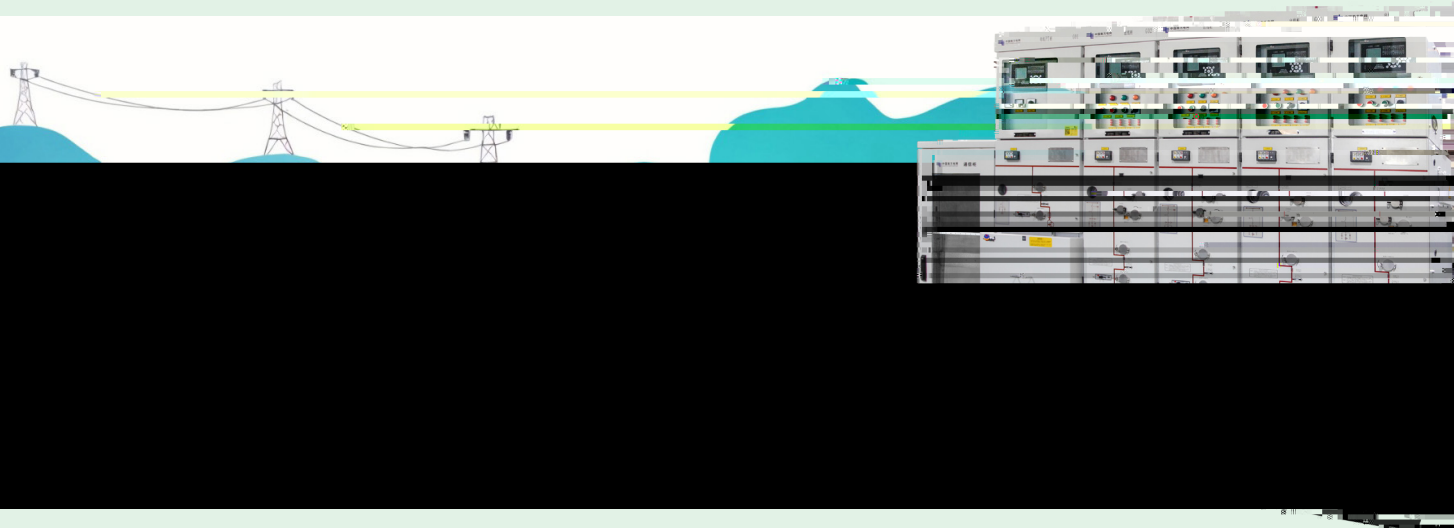

Product description

The ZCSF-12/ZCKQG-12 RMU is suitable for power system in the three-phase 50 Hz with the rated voltage of 3.6 to 12 kV. It is mainly used in industrial and civil cable ring networks and power supply terminals. The product is compatible with vacuum circuit breakers, SF₆ load break switches, and load switch/fuse combination units. It is adaptable to indoor environments with altitude up to 4,000m.



Electrical features

limits

class earthing switch (5 times)

mechanically type tested for 10,000 and 5,000 operations respectively

load switch

video footages can be stored and shared

Technical features

BUDPWEIL

